

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
22 February 2001 (22.02.2001)

PCT

(10) International Publication Number
WO 01/12491 A1(51) International Patent Classification⁷: B62B 1/26

(21) International Application Number: PCT/GB00/03195

(22) International Filing Date: 18 August 2000 (18.08.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
9919420.1 18 August 1999 (18.08.1999) GB

(71) Applicant and


(72) Inventor: GEE, Graham [GB/GB]; 112 Corporation
Street, Chorley, Lancashire PR6 0DN (GB).(74) Agents: BRIERLEY, Anthony, Paul et al.; Appleyard
Lees, 15 Clare Road, Halifax HX1 2HY (GB).(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CONTAINER MOVING APPARATUS

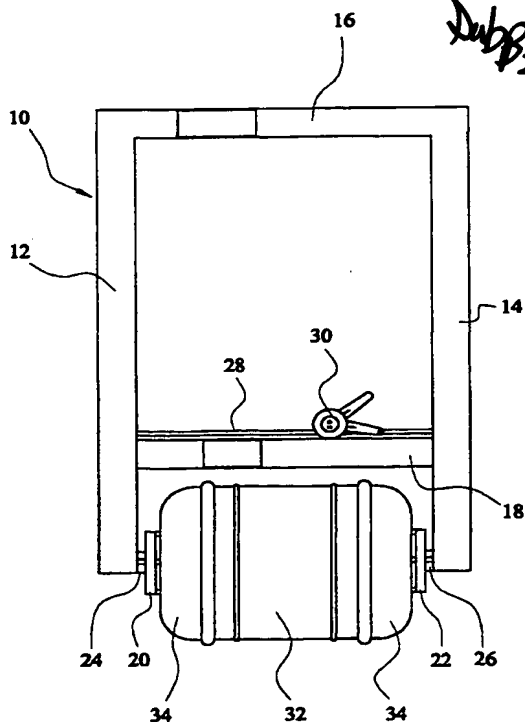

(57) Abstract: Containers containing fluid can be difficult to move especially in a controlled manner. Container moving apparatus (10) comprises a frame comprising two side members (12, 14) which are connected at an upper location by a handle section (16). Each side member has a clamping member (20, 22) secured at a lower position. The clamping members (20, 22) are secured to the side members (12, 14) through roller bearings (24, 26) in order for the clamping members (20, 22) to rotate relative to the side members (12, 14). The clamping members (20, 22) are arranged to clamp a container (32) therebetween in order for the container (32) to be rolled along a surface under the control of the handle section (10). The clamping members (20, 22) can be moved apart in order to release the container (32) and move towards each other in order to clamp the container (32).

WO 01/12491 A1